

Hanbul Filtration Dust Collector

Hanbul Energy Management Co.

September 22-27, 2006

APPLICATION AREA: Inside of filtration collectors at Incinerator plant No. 1&2 – SUS304, SS400

PURPOSE : Prevent corrosion inside filtration collectors at incineration plants

METHOD: Power wash with water first and then grind Apply RUST GRIP [®] twice (Ave. 200~250microns) Apply LINING – KOTE [®] twice (Ave. 200~250microns)



Upper area of filtration facility



Lower area of filtration facility



Before – upper area



Before – upper area magnified



Before – lower area



Before – lower area magnified



Power wash



After power wash



After power wash – insides



After grinding – insides



After grinding – upper side magnified




After grinding – lower side magnified



1st RUST GRIP application




2nd RUST GRIP application

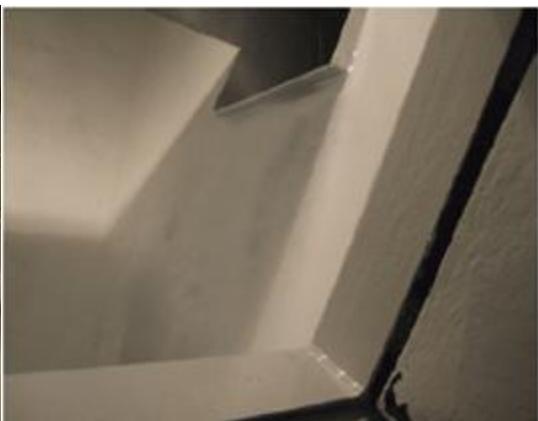

2nd [RUST GRIP](#) application



1st Lining Kote application

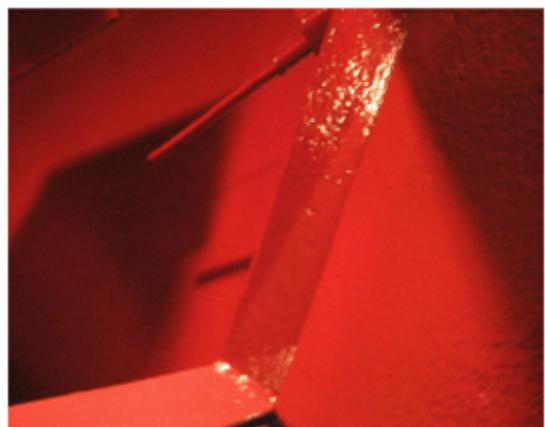

2nd Lining Kote application